

hypercharger 225 hypercharger 300

225kW / 300kW fast charging system for electric vehicles

Key Features



Benchmark current density with maximum 700ADC for (cable limitation 500A currently)

Future-proof wide output voltage range from 150V to 1000V

Highly integrated system in a compact design

Up to two vehicle outlets possible (CCS and CHAdeMO)

Scalable power due to hypercharger power stack concept



Technical Data

System Specification	
DC-connection standard	CCS1 or CCS2 uncooled cable acc. IEC 62196 CCS Combo2 active cooled cable acc. IEC 62196 Optional: CHAdeMO and/or 22kW AC plug
Ambient	In- and Outdoor installation
Working temperature	-30° to +55°C
Humidity	10% - 90% relative humidity
Protection degree	IP 54
Efficiency	94% @ full power
Operating noise level	< 65dBA
Grid	
AC Input voltages	3x400V (± 10%) / 50 Hz (± 5%) or 3x480V (± 10%) / 60Hz (± 5%)
AC Input current and power (from grid)	352 A, 240kW @ 225kW DC output power 466 A, 320kW @ 300kW DC output power
THDI in all operating points	< 7%
Power factor with active PFC correction	> 0,99
DC-Output	
Maximum DC output power	255kW (three stack), max. 500A 300kW (four stacks), max 500A
Output DC voltage range	150V - 1000V
Maximum output current	I _{max} : 500A (with active cooled cable + plug)
General	
DC-protocol standard	EN 61851-23/DIN 70121; ISO 15118 Combo 2 Optional CHAdeMO 1.0
RFID-System	ISO/IEC 14443A/B, ISO/IEC 15693
Network connection	GSM-/CDMA-Modem, 10/100Base T-Ethernet
Charging infrastructure communication protocol	Open Charge Point Protocol (OCPP) 1.6
User Interface	15" screen 15" touch screen display (optional)

225kW / 300kW fast charging system for electric vehicles

Performance

With a power rating of 225 kW, this system comes with a housing offering an upgrade to 300kW at a later stage. It provides unrivalled current capability of more than 600A limited by the current cable technology and the overall power rating. It configures to all charging standards, including CCS 1 and 2, CHAdeMO and GBT, and complies with all the norms and the OCPP protocol standards. Its ultra fast performance awaits the EVs which can cope with the ability.

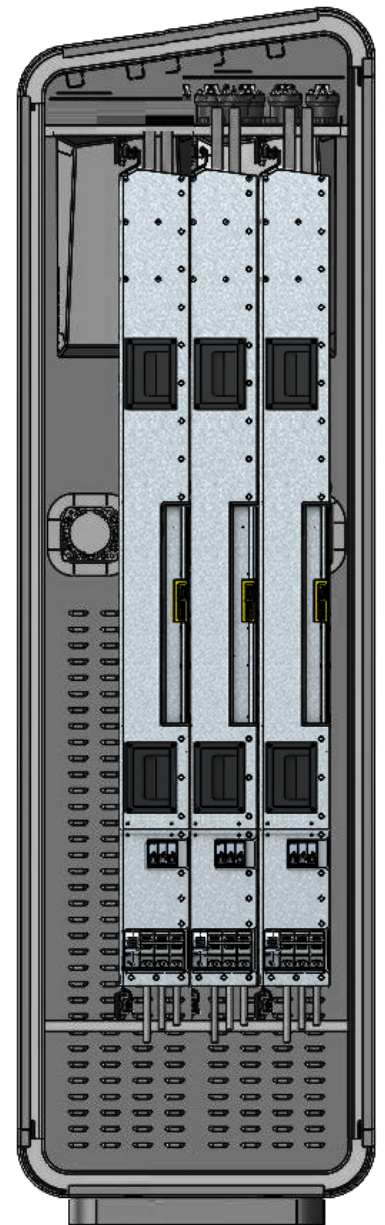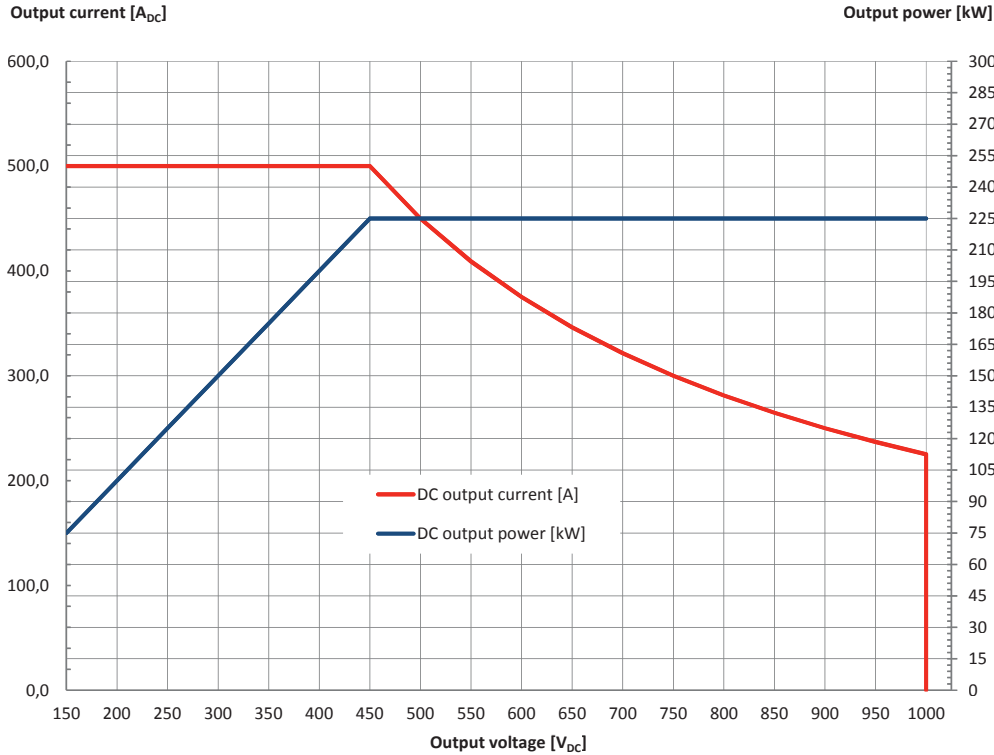

225kW / 300kW fast charging system for electric vehicles

Performance

Here it comes. Our best performance device is the hypercharger 300 offering 300kW at the full temperature range and up to 350kW when temperature is derated to +30°C ambient. More than 700A could be delivered, limited only by the available cable and connector technology. The systems amazing power density – integrating all of power electronics and interfaces - enables an integration of such charging systems into critical narrow parking slot situations. The finest art of hyper-fast-charging. Modern and modular by design.

